

LISY - DVOŘÁK
wood gluing presses





LPQ

ENGINEERED FLOORING

ALL IN 1 LINE

- ✓ GLUE SPREADER
- ✓ MAT. TRANSFER
- ✓ PRESSING
- ✓ MAT. OUTPUT

ENGINEERED FLOORS

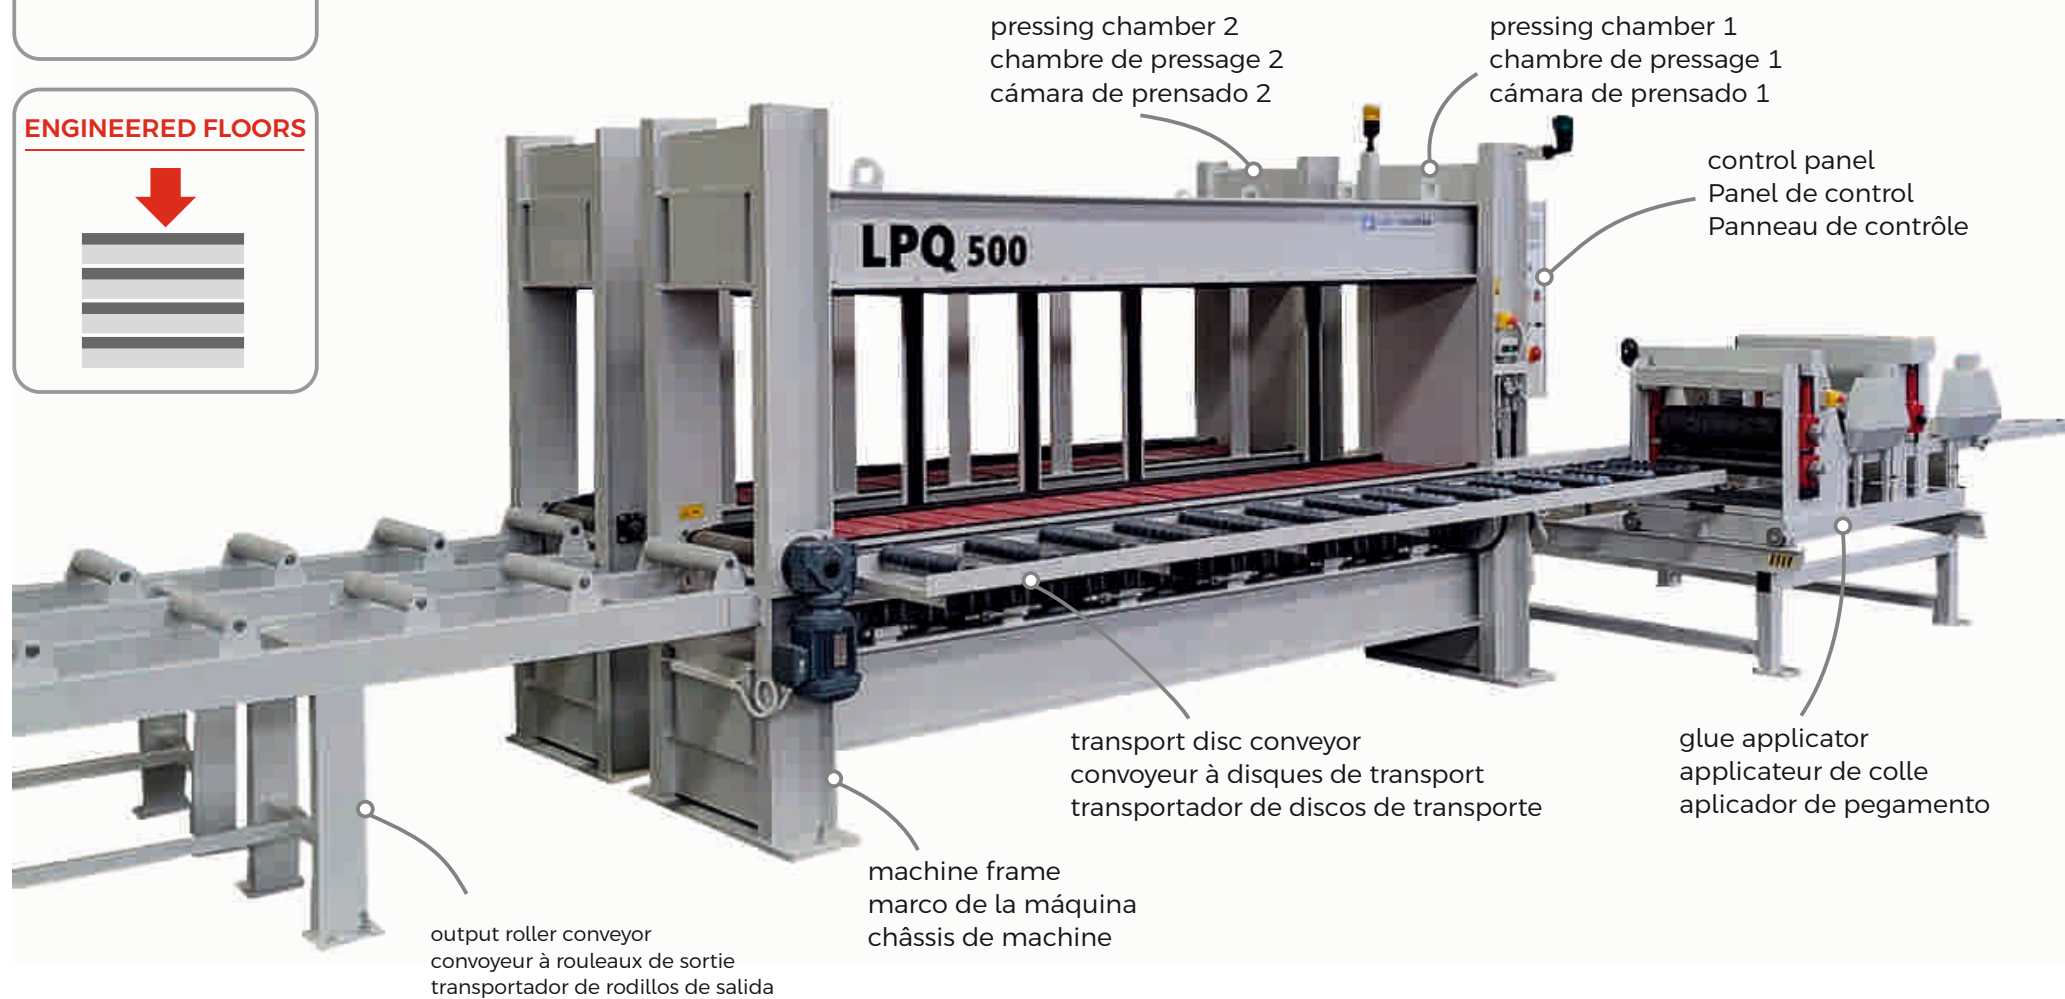

pressing chamber 2
chambre de pressage 2
cámara de prensado 2

pressing chamber 1
chambre de pressage 1
cámara de prensado 1

control panel
Panel de control
Panneau de contrôle

glue applicator
applicateur de colle
aplicador de pegamento

transport disc conveyor
convoyeur à disques de transport
transportador de discos de transporte

machine frame
marco de la máquina
châssis de machine

output roller conveyor
convoyeur à rouleaux de sortie
transportador de rodillos de salida

TECHNICAL PARAMETERS	LPQ	
overall machine length	according the working length	m
overall machine height	2 200	mm
overall depth (width)	600	mm
weight	according the length	kg
max. gluing length (X axis)	2 000 - 6 000	mm
max. gluing height (Y axis)	1 050 / 1 250	mm
max. material thickness = gluing depth (Z axis)	50 / 90	mm
pressure	individual	kg/cm ²
number of pressing units	4 - 20	pcs
number of top aligning beams	4 - 20	pcs
max. pressing unit force	2 000 [20] / 4 000 [40]	kg [kN]
max. front aligning bar force (manual - screw)	300 [0,3]	kg [kN]
pressing unit stroke	90	mm
electrohydraulic pump power	1,5 - 2,2	kW
pressure setting	on control panel	-
electrical protection	IP 54	-
voltage	3x 400V / 50 Hz	-
hydraulic oil class	HM 46	12 liters

* machine equipment can be modified by client requirements individually

LISY - DVOŘÁK, s.r.o.

Kňovická 344

264 01 Sedlčany, Czech Republic

e-mail: info@lisy-dvorak.cz

web: www.lisy-dvorak.cz

GSM: **00420 732 240 341**

GSM: **00420 736 645 159**



<https://www.instagram.com/lisydvorak/>



<https://www.facebook.com/lisydvorak/>



<https://www.youtube.com/channel/UCz8HvcZz27siCo0CnglizOQ>