

LISY - DVOŘÁK
wood gluing presses




TH3

PRESS FOR BOARDS

main pressing unit (adjustable in X and Y axis)
 unidad de prensado principal (ajustable en los ejes X e Y)
 unité de pressage principale (réglable en axes X et Y)



3 WORK TABLES



MANUAL / AUTOMATIC



VARIABLE AXIS X+Y

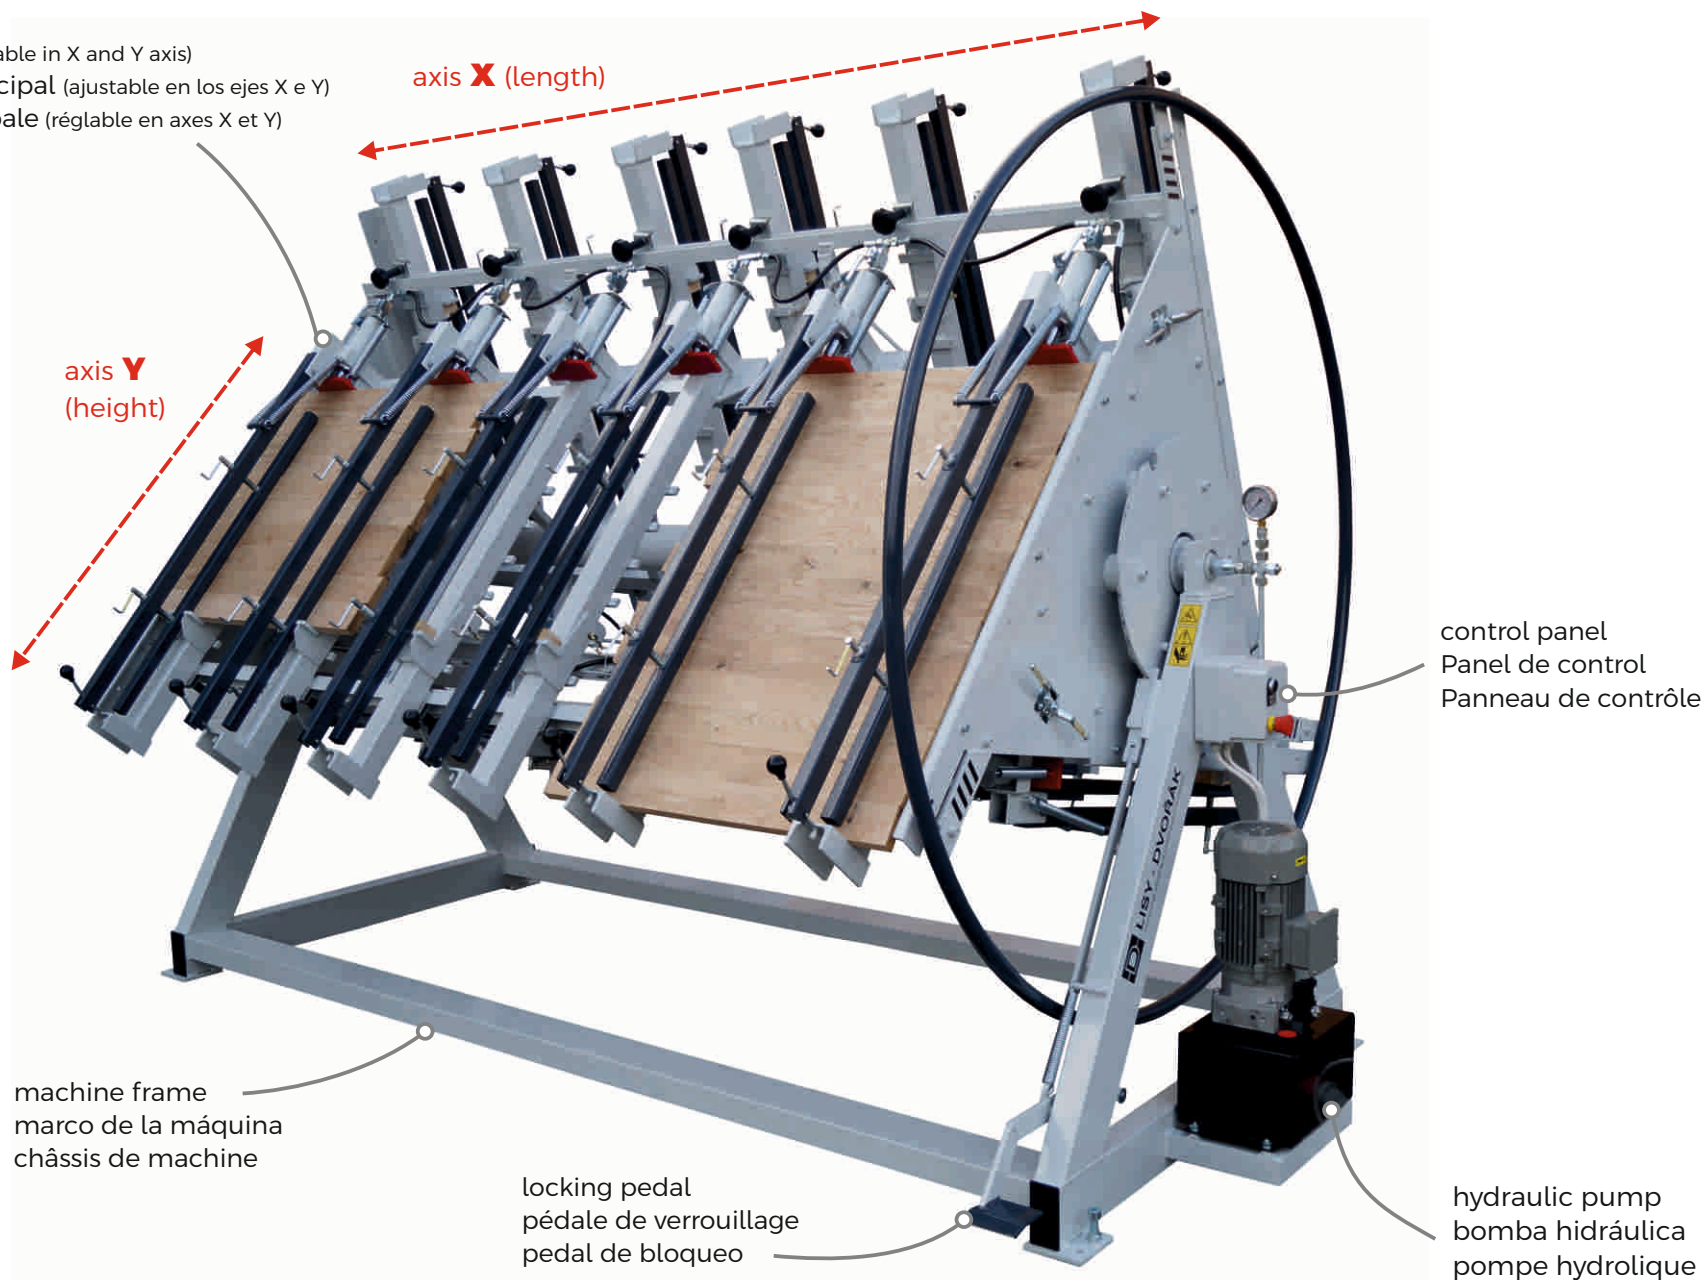

TECHNICAL PARAMETERS	TH3	
overall machine length	according the working length	m
overall machine height	2 350 / 2 500	mm
overall depth (width)	2 350 / 2 500	mm
weight	according the length	kg
max. gluing length (X axis)	2 000 - 6 000	mm
max. gluing height (Y axis)	1 050 / 1 250	mm
max. material thickness = gluing depth (Z axis)	50 / 90	mm
pressure	individual	kg/cm ²
number of pressing units	4 - 20	pcs
number of top aligning beams	4 - 20	pcs
max. pressing unit force	2 000 [20] / 4 000 [40]	kg [kN]
max. front aligning bar force (manual - screw)	300 [0,3]	kg [kN]
pressing unit stroke	90	mm
electrohydraulic pump power	1,5 - 3	kW
pressure setting	on control panel	-
electrical protection	IP 54	-
voltage	3x 400V / 50 Hz	-
hydraulic oil class	HM 46	12 liters

* machine equipment can be modified by client requirements individually

LISY - DVOŘÁK, s.r.o.

Kňovická 344

264 01 Sedlčany, Czech Republic

e-mail: info@lisy-dvorak.cz

web: www.lisy-dvorak.cz

GSM: **00420 732 240 341**

GSM: **00420 736 645 159**



<https://www.instagram.com/lisydvorak/>



<https://www.facebook.com/lisydvorak/>



<https://www.youtube.com/channel/UCz8HvcZz27siCo0CnglizOQ>