


LISY - DVOŘÁK
wood gluing presses

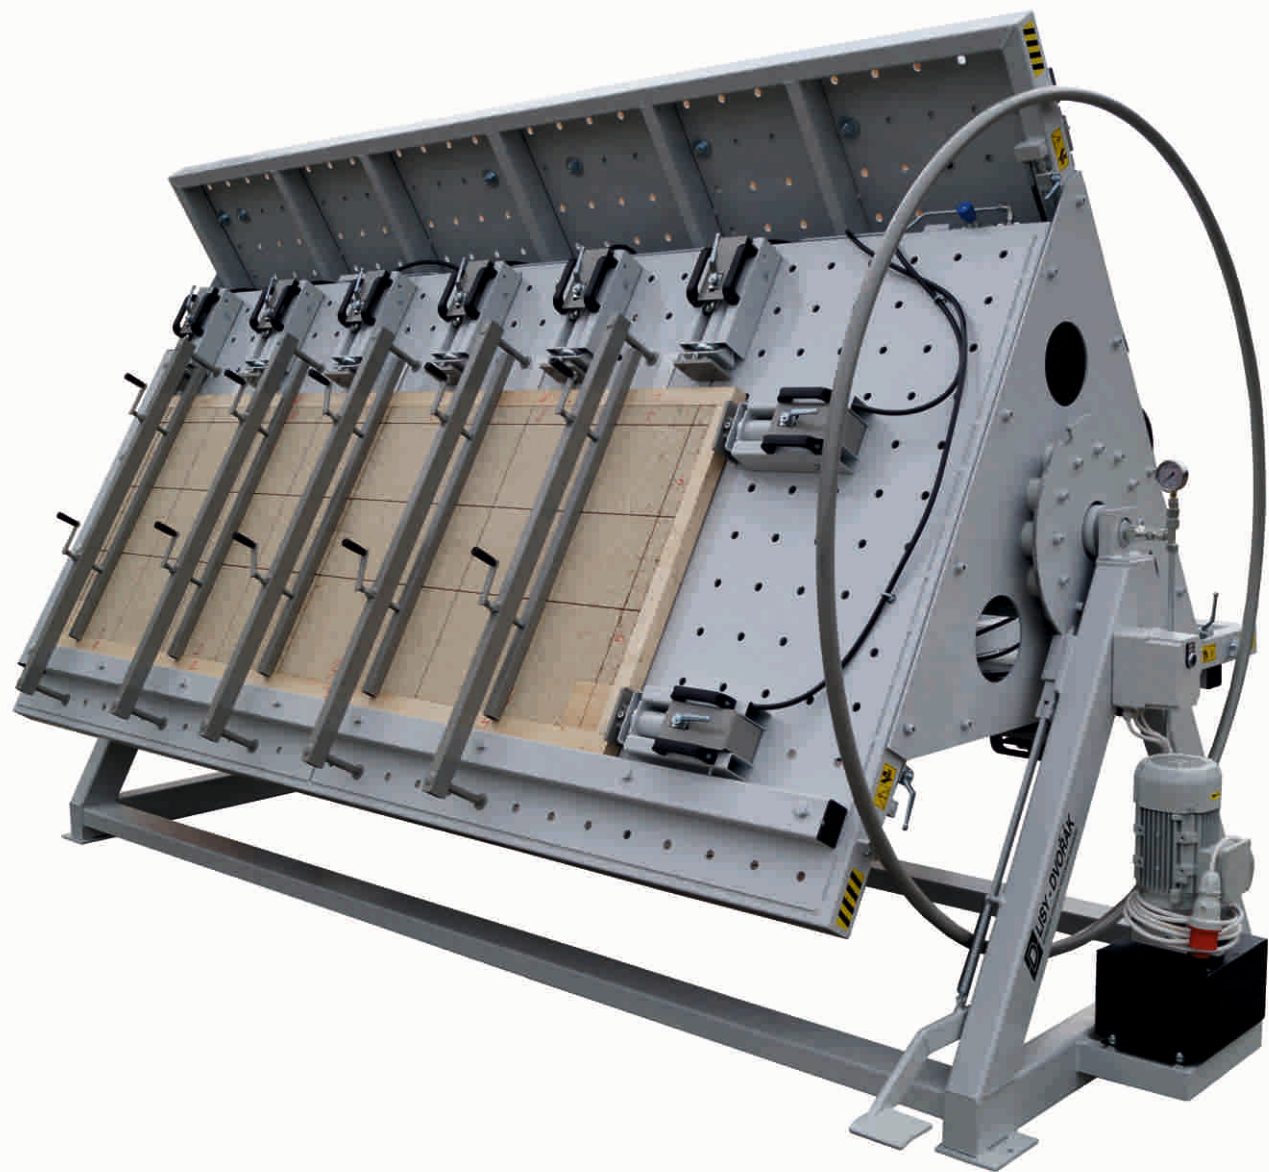


TLSU


PRESS FOR BOARDS

main pressing unit (adjustable on raster table)
 unidad de prensado principal (réglable sur table raster)
 unité de pressage principale (ajustable en la tabla raster)

3 WORK TABLES



RASTER TABLE



MANUAL / AUTOMATIC



axis **X** (length)

axis **Y**
(height)

machine frame
marco de la máquina
châssis de machine

locking pedal
pédale de verrouillage
pedal de bloqueo

control panel
Panel de control
Panneau de contrôle

hydraulic pump
bomba hidráulica
pompe hydraulique

TECHNICAL PARAMETERS	TLSU	
overall machine length	according the working length	m
overall machine height	2 350 / 2 500	mm
overall depth (width)	2 350 / 2 500	mm
weight	according the length	kg
max. gluing length (X axis)	2 000 - 3 500	mm
max. gluing height (Y axis)	800	mm
max. material thickness = gluing depth (Z axis)	60	mm
pressure	individual	kg/cm ²
number of pressing units	4 - 10	pcs
number of top aligning beams	4 - 8	pcs
max. pressing unit force	2 000 [20] / 4 000 [40]	kg [kN]
max. front aligning bar force (manual - screw)	300 [0,3]	kg [kN]
pressing unit stroke	90	mm
electrohydraulic pump power	1,5 - 2,2	kW
pressure setting	on control panel	-
electrical protection	IP 54	-
voltage	3x 400V / 50 Hz	-
hydraulic oil class	HM 46	12 liters

* machine equipment can be modified by client requirements individually

LISY - DVOŘÁK, s.r.o.

Kňovická 344

264 01 Sedlčany, Czech Republic

e-mail: info@lisy-dvorak.cz

web: www.lisy-dvorak.cz

GSM: **00420 732 240 341**

GSM: **00420 736 645 159**



<https://www.instagram.com/lisydvorak/>



<https://www.facebook.com/lisydvorak/>



<https://www.youtube.com/channel/UCz8HvcZz27siCo0CnglizOQ>