



LISY - DVOŘÁK
wood gluing presses

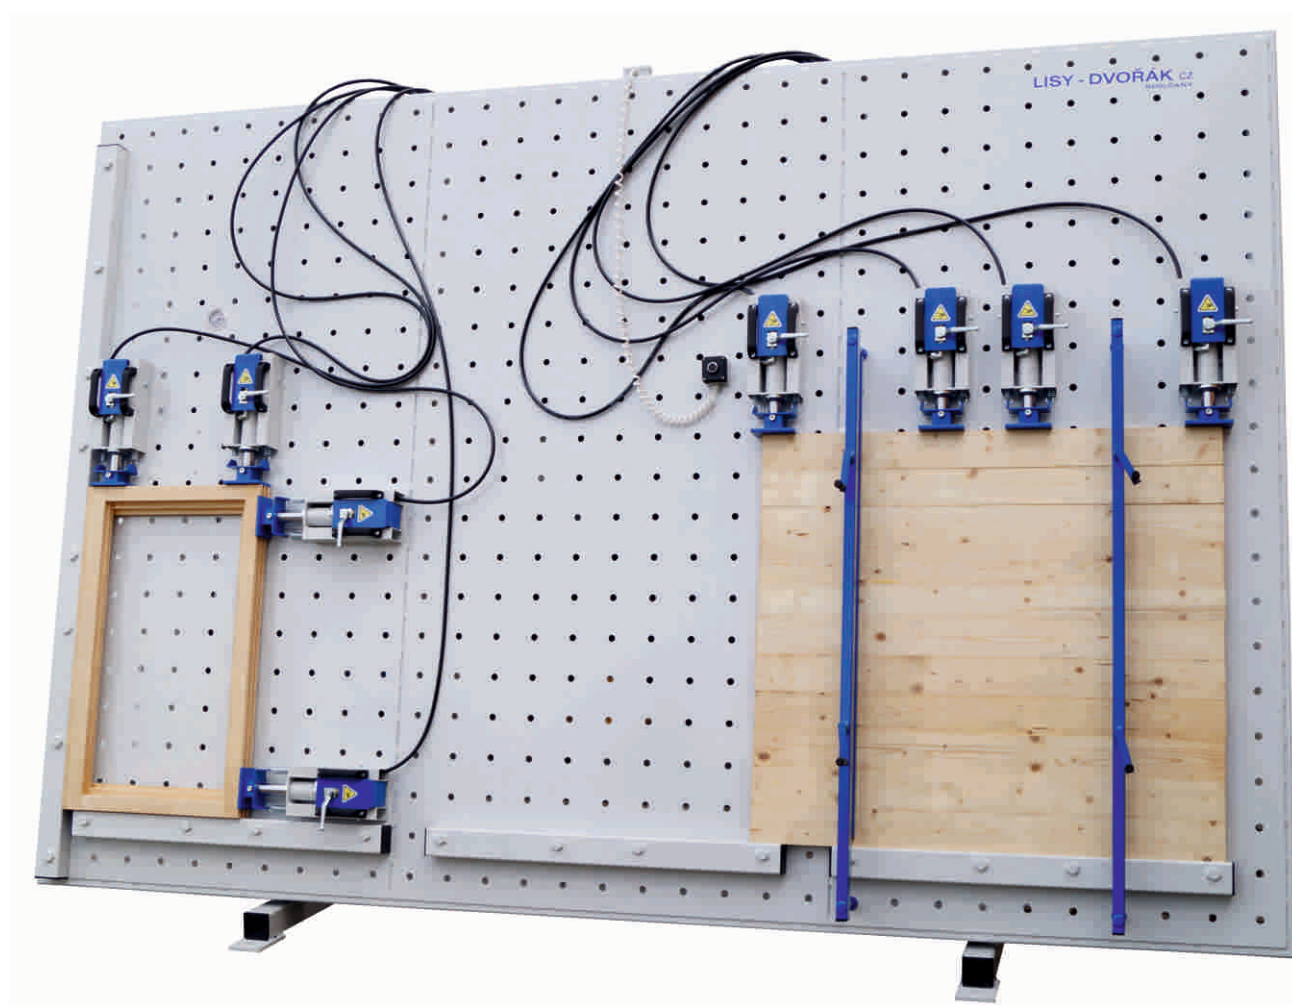


LSU
RASTER PRESS

RASTER TABLE



PRESSING UNITS TYPES

3

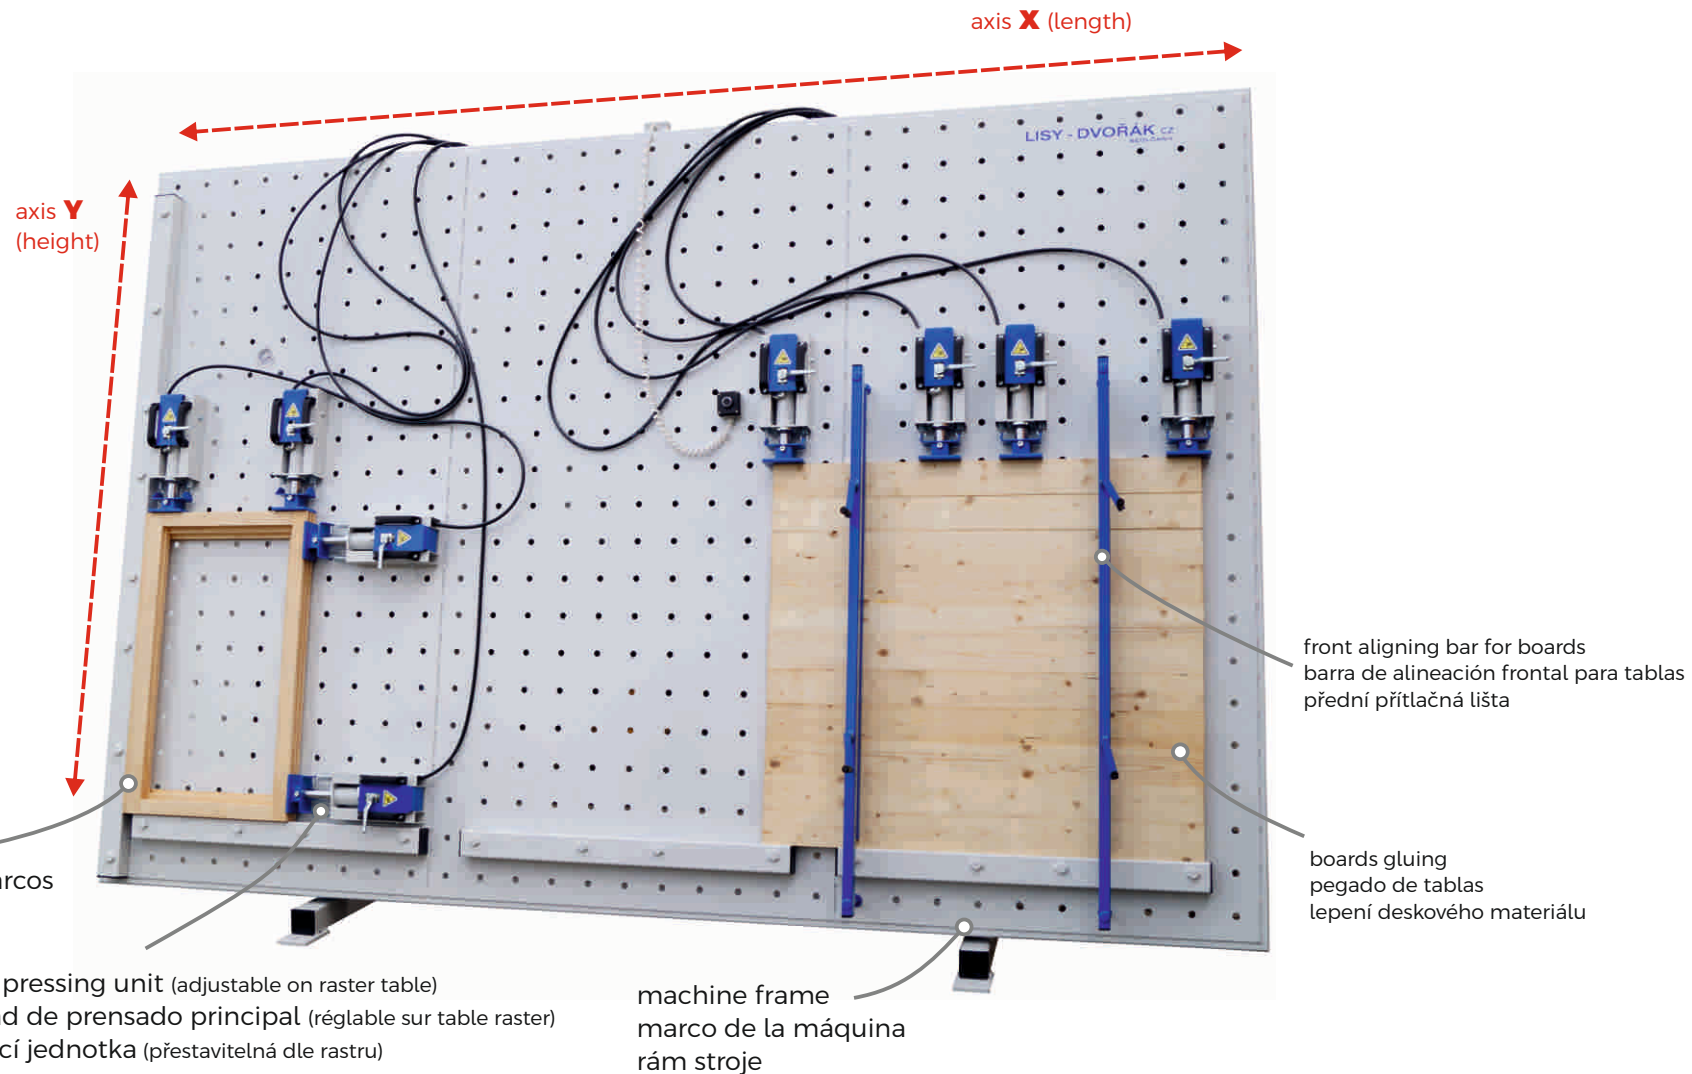

TECHNICAL PARAMETERS	LSU	
overall machine length	2 680 / 3 250 / 3 850	m
overall machine height	2 350 / 2 350 / 2 650	mm
overall depth (width)	850 / 850 / 900	mm
weight	according the model type	kg
max. frame gluing length (X axis)	2 150 / 2 720 / 3 020	mm
max. frame gluing height (Y axis)	1 580 / 1 580 / 2 020	mm
max. gluing desk height (Y axis)	1 400	mm
max. material thickness = gluing depth (Z axis)	80	mm
rester setting	X,Y - 114	mm
max. number of pressing units	10	pcs
max. number of top aligning bars	8	pcs
max. pressing unit force	1 200 [12] / 2 000 [20]	kg [kN]
max. front aligning bar force (manual - screw)	300 [0,3]	kg [kN]
pressing unit cylinder stroke	120	mm
electrohydraulic pump power	0,8 - 1,5	kW
hydraulic pressure setting	YES, pressure regulator	-
voltage	3x 400V / 50 Hz	-
hydraulic oil class	HM 46	6 liters

* machine equipment can be modiflicated by client requirements individually

LISY - DVOŘÁK, s.r.o.

Kňovická 344

264 01 Sedlčany, Czech Republic

e-mail: info@lisy-dvorak.cz

web: www.lisy-dvorak.cz

GSM: **00420 732 240 341**

GSM: **00420 736 645 159**



<https://www.instagram.com/lisydvorak/>



<https://www.facebook.com/lisydvorak/>



<https://www.youtube.com/channel/UCz8HvcZz27siCo0CnglizOQ>